

Single Band 5GHz 4x4 802.11ac Wave 2 MiniPCle WiFi Module

Designed for High Bandwidth Enterprise Wireless Access Points

Model: WLE1216V5-20-I



KEY FEATURES

- Qualcomm Atheros QCA9994
- 5GHz, 4x4 MU-MIMO OFDM Technology, up to 1733Mbps physical data rate
- Single Band 5GHz 4x4 WiFi 5 (802.11ac Wave 2)
- MiniPCle interface with PCIe 2.0
- Full size form factor with 80+80MHz bandwidth support
- Heat sink allows free air operation
- IEEE 802.11ac compliant & backward compatible with 802.11a/n
- 4 spatial streams (4SS) at 80MHz
- 2 spatial streams (2SS) at 80+80MHz
- Supports Spatial Multiplexing, Cyclic-Delay Diversity (CDD), Low-Density Parity Check (LDPC) Codes, Maximal Ratio Combining (MRC), Space Time Block Code (STBC)
- Supports IEEE 802.11d, e, h, i, j, k, r, u, v time stamp, w, and z standards
- Supports Dynamic Frequency Selection (DFS)

Specifications

Chipset	Qualcomm Atheros QCA9994 'Cascade' Series
System Memory	256Kbit serial I ² C bus EEPROM
Reference Design	Qualcomm Atheros CUS239
Host Interface	MiniPCle interface with PCIe 2.0
Operating Voltage	3.3V
Power Consumption	8.5W (Max)
Wireless	5GHz 802.11a/n/ac, max 21dBm per chain 4x U.FL Connectors
Frequency Range	5.150~5.825GHz
Modulation Techniques	OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Channel Spectrum Widths for WLAN	Supports 20/40/80/80+80MHz at 5GHz
ESD Sensitivity	Class 1B
Supported Operating System	Supported by CompexWRT (v3.x and above) with Qualcomm Atheros reference wireless drivers; on WPJ558, WPJ563, and WPJ564: throughput up to 800Mbps; on WPQ864 and WPQ865: throughput up to 1300Mbps; or OpenWRT/LEDE with ath10k wireless drivers.
Certification	FCC, CE Certified, REACH and RoSH Compliance
Environmental Temperature (Industrial Grade)	Operating: -40°C to 85°C, Storage: -40°C to 90°C
Environmental Humidity, Non-Condensing	Operating: 5% to 95%, Storage: Max. 90%
Dimensions (W x H x D) in mm	29.9 x 50.8 x 12.9


RF Performance Table for 5GHz

	Data Rate	TX Power (per chain)	TX Power (4 chains)	Tolerance
5GHz 802.11a	6Mbps	21dBm	27dBm	±2dB
	9Mbps	21dBm	27dBm	±2dB
	12Mbps	21dBm	27dBm	±2dB
	18Mbps	21dBm	27dBm	±2dB
	24Mbps	20dBm	26dBm	±2dB
	36Mbps	19dBm	25dBm	±2dB
	48Mbps	18dBm	24dBm	±2dB
	54Mbps	17dBm	23dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	21dBm	27dBm	±2dB
	MCS 1	21dBm	27dBm	±2dB
	MCS 2	21dBm	27dBm	±2dB
	MCS 3	20dBm	26dBm	±2dB
	MCS 4	19dBm	25dBm	±2dB
	MCS 5	18dBm	24dBm	±2dB
	MCS 6	17dBm	23dBm	±2dB
	MCS 7	16dBm	22dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 8	15dBm	21dBm	±2dB
	MCS 0	21dBm	27dBm	±2dB
	MCS 1	21dBm	27dBm	±2dB
	MCS 2	21dBm	27dBm	±2dB
	MCS 3	20dBm	26dBm	±2dB
	MCS 4	19dBm	25dBm	±2dB
	MCS 5	18dBm	24dBm	±2dB
	MCS 6	18dBm	24dBm	±2dB
5GHz 802.11ac VHT80	MCS 7	17dBm	23dBm	±2dB
	MCS 8	16dBm	22dBm	±2dB
	MCS 9	15dBm	21dBm	±2dB
	MCS 0	20dBm	26dBm	±2dB
	MCS 1	20dBm	26dBm	±2dB
	MCS 2	20dBm	26dBm	±2dB
	MCS 3	20dBm	26dBm	±2dB
	MCS 4	19dBm	25dBm	±2dB
5GHz 802.11ac VHT80+80	MCS 5	18dBm	24dBm	±2dB
	MCS 6	18dBm	24dBm	±2dB
	MCS 7	17dBm	23dBm	±2dB
	MCS 8	16dBm	22dBm	±2dB
	MCS 9	15dBm	21dBm	±2dB
	MCS 0	20dBm	26dBm	±2dB
	MCS 1	20dBm	26dBm	±2dB
	MCS 2	20dBm	26dBm	±2dB


	Data Rate	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	-94dBm	±2dB
	9Mbps	-93dBm	±2dB
	12Mbps	-92dBm	±2dB
	18Mbps	-89dBm	±2dB
	24Mbps	-86dBm	±2dB
	36Mbps	-84dBm	±2dB
	48Mbps	-79dBm	±2dB
	54Mbps	-77dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	-94dBm	±2dB
	MCS 1	-91dBm	±2dB
	MCS 2	-90dBm	±2dB
	MCS 3	-86dBm	±2dB
	MCS 4	-83dBm	±2dB
	MCS 5	-80dBm	±2dB
	MCS 6	-77dBm	±2dB
	MCS 7	-75dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 8	-71dBm	±2dB
	MCS 0	-91dBm	±2dB
	MCS 1	-88dBm	±2dB
	MCS 2	-85dBm	±2dB
	MCS 3	-82dBm	±2dB
	MCS 4	-79dBm	±2dB
	MCS 5	-75dBm	±2dB
	MCS 6	-73dBm	±2dB
5GHz 802.11ac VHT80	MCS 7	-72dBm	±2dB
	MCS 8	-69dBm	±2dB
	MCS 9	-66dBm	±2dB
	MCS 0	-88dBm	±2dB
	MCS 1	-85dBm	±2dB
	MCS 2	-83dBm	±2dB
	MCS 3	-79dBm	±2dB
	MCS 4	-76dBm	±2dB
5GHz 802.11ac VHT80+80	MCS 5	-71dBm	±2dB
	MCS 6	-69dBm	±2dB
	MCS 7	-69dBm	±2dB
	MCS 8	-65dBm	±2dB
	MCS 9	-62dBm	±2dB
	MCS 0	-88dBm	±2dB
	MCS 1	-85dBm	±2dB
	MCS 2	-83dBm	±2dB

Component Map

U.FL connectors

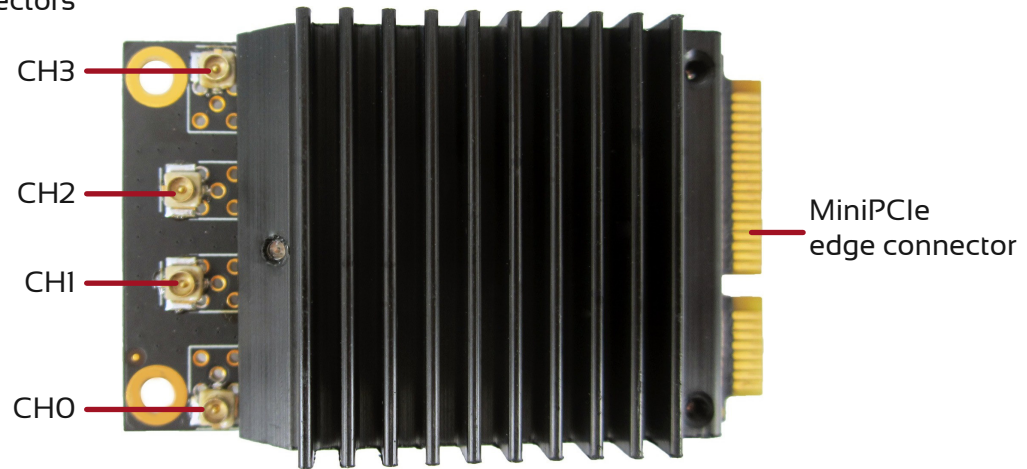



Mechanical Dimensions

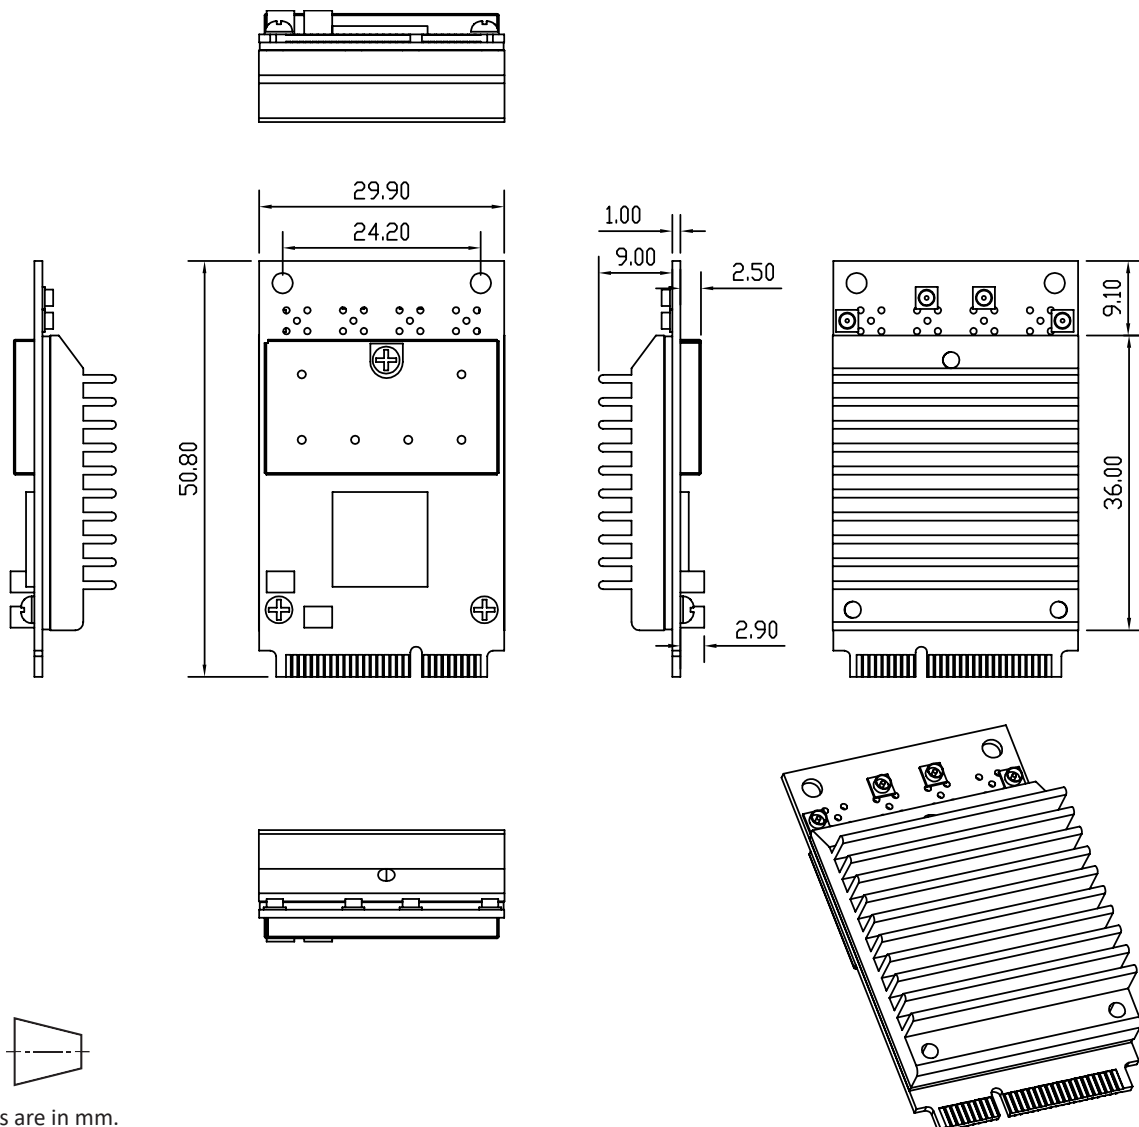

All dimensions are in mm.

Copyright © Compex Systems. All rights reserved. COMPEX and the COMPEX logo, are registered trademarks of Compex Systems Pte. Ltd. While every effort is made to ensure the information is accurate, Compex does not accept liability for any errors or mistakes that may arise. All specifications are subject to change without notice.

Heatsink Options

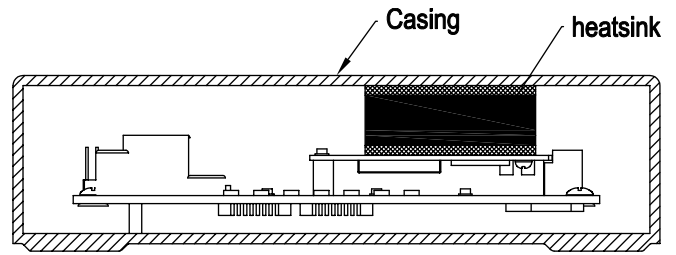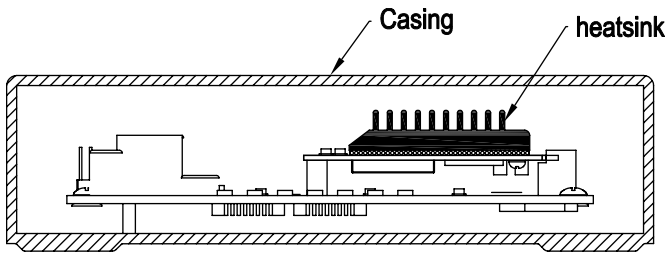

Ordering Configuration

Item Code	Model	Description
WLE1216V5-20 7B001.03-I-2	WLE1216V5-20-I	Industrial Grade 4x4 802.11a/n/ac 5GHz Wave 2 miniPCle card